


Stripwound flexible metal hose, galvanized steel interlocked for electrical cable protection gas exhaust and EMC shielding

Type DOU double overlap, unpacked – UNI EN ISO 15465:2005

CLASSIFICATION	UNI CEI EN 61386
Resistance to compression	4
Resistance to impact	4
Lower temperature - 40 °C	5
Upper temperature +250 °C	6
Bending	Pliable and retain the shape
Electrical characteristics	maintain electrical continuity and EMC shielding
IP protection according CEI EN 60529	IP40
Corrosion resistance	Medium
Tensile strength up to Ø 40 mm	4
Tensile strength from Ø 45 ÷ Ø 300	5
Flame propagation	Non-flame propagating
Suspended load capacity	According to Ø (3 - 5)
RoHS – REACH compliance	Yes
Material type	DX 51D / Z100 Galvanized Steel
Made in European Union	Yes



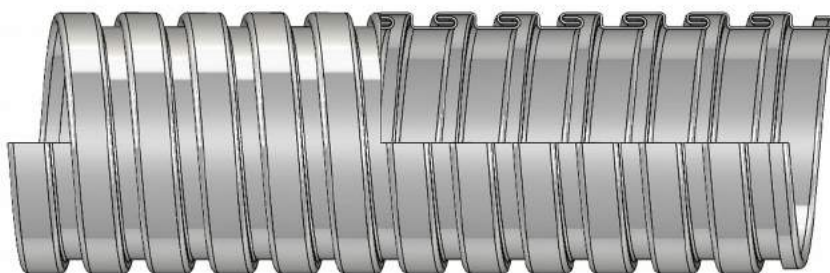

CODE	int. Ø mm	ext. Ø mm	Profile	Bending mm	Weight Kg/m
ZD0015	15	18	DOU	55	0,22
ZD0018	18	21	DOU	65	0,26
ZD0020	20	25	DOU	70	0,51
ZD0022	22	27	DOU	77	0,55
ZD0025	25	30	DOU	86	0,62
ZD0028	28	33	DOU	95	0,69
ZD0030	30	35	DOU	102	0,73
ZD0032	32	37	DOU	108	0,78
ZD0032B	32	37	DOU	108	0,97
ZD0035	35	40	DOU	117	0,84
ZD0038	38	43	DOU	127	0,91
ZD0040	40	45	DOU	163	1,10
ZD0040B	40	45	DOU	163	1,38
ZD0042	42	47	DOU	171	1,15
ZD0045	45	50	DOU	182	1,23
ZD0045B	45	50	DOU	182	1,54
ZD0048	48	53	DOU	194	1,31
ZD0050	50	55	DOU	201	1,36
ZD0055	55	60	DOU	221	1,49
ZD0060	60	65	DOU	240	1,62
ZD0065	65	70	DOU	259	1,75
ZD0070	70	75	DOU	278	1,88
ZD0075	75	80	DOU	297	2,01
ZD0080	80	85	DOU	316	2,14
ZD0085	85	90	DOU	336	2,27
ZD0090	90	95	DOU	355	2,40
ZD0095	95	100	DOU	374	2,53
ZD0100	100	105	DOU	393	2,66
ZD0105	105	110	DOU	412	2,79
ZD0110	110	115	DOU	431	2,92
ZD0115	115	120	DOU	451	3,05
ZD0120	120	125	DOU	470	3,17
ZD0125	125	130	DOU	489	3,30
ZD0130	130	135	DOU	508	3,43
ZD0135	135	140	DOU	527	3,56
ZD0140	140	145	DOU	546	3,69
ZD0145	145	150	DOU	566	3,82
ZD0150	150	155	DOU	585	3,95
ZD0160	160	165	DOU	696	5,43
ZD0170	170	175	DOU	739	5,76
ZD0180	180	185	DOU	782	6,10
ZD0200	200	205	DOU	867	6,76
ZD0250	250	255	DOU	1081	8,43
ZD0275	275	280	DOU	1188	9,27
ZD0300	300	307	DOU	1300	10,14

sales@ommcitalflex.com

Packaging: [1] reel at specific measure [2] cutted at custom length [3] cutted with assembled fittings